


## PU Double Component UV Road Marking Paint

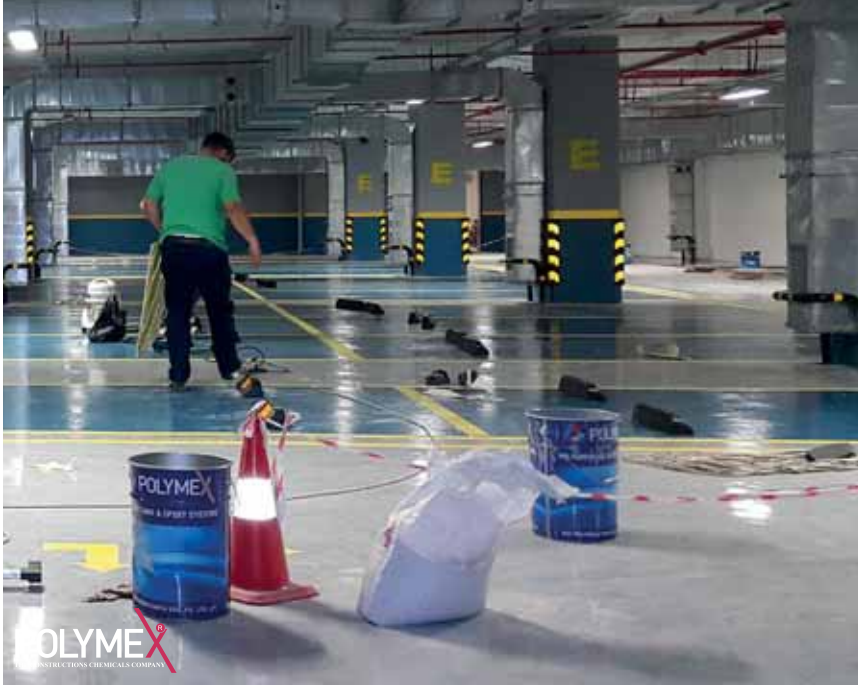

## Product Description

Hava kurumalı, yapışma özelliği mükemmel ve sararmama özelliğine sahip yüksek esneklik ve mükemmel aşınma direnci olan. Çok hızlı kuruma Özelliğine sahip, tuz ve kimyasallara karşı yüksek mukavemet gösterir.

## Product Description

It has the features air drying, excellent adhesion and not getting yellowish or fading. It has high flexibility and excellent wear resistance. It has very fast dry feature and it is a road marking paint with high resistance against chemicals and salt.

## Areas of Application

It is used to regulate the traffic flow in road bordures involved in road transport.

## Attention

Store in well ventilated closed places, wear masks and gloves, don't touch directly and inhale the vapor, keep away from open ignition sources.

## Technical Specifications

<b>Colors</b>	White, yellow, black and grey
<b>pH value</b>	It cannot be measured, as it is not ionic
<b>Final appearance</b>	Mat - bright
<b>Flash point</b>	190 C
<b>Theoretical mixing ratio</b>	It is added in the A component immediately before the application related to weather temperature in the ratio of hardener. A: 1.60 ± 0.02 gr/ ml B: 1.20 ± 0.02 gr/ml About 20 minutes in 23 C
<b>Density</b>	Class UV1 0.05 for white and yellow Class BR2 0.05 for white and yellow
<b>Dry time</b>	In the application of 300 microns
<b>Aging values in UV</b>	95% for white, 90% for yellow in a single layer
<b>Throwing up resistance values</b>	Compatible with AST D 562 standard
<b>Covering quality</b>	In tins of 18, 20, 25 kg
<b>Viscosity</b>	About 1 year in unopened packages and cold place

## Storage and Shelf Life

24 month in dry and cold places

## Packing

As a set of 20 kg.

